

			Contact
Part NO.	150WQ100	-10-5.5(JY)(I)	Note
Product Picture			Note
			The sewage submersible pump is composed of two parts: the motor and the pump. The two are separated by an oil chamber and a mechanical seal assembly. Divided into fixed automatic coupling installation and mobile installation
technology			
Pump rotator speed		2940	
Nameplate standards		CE	

Pump case Installation

Pump shaft

Rubber code

Material Impeller

Connection Code F

Maximum Pressure/Temperatu 6bar/40
Flange Standard DIN
Pressure Class PN6

HT200

20cr13

HT200

Р

Medium

Medium Temperature 40
Maximum diameter of partic 31
Maximum Environment Temper 40

Structure dimension

Standard caliber DN
Outlet Diameter DN150

Motor


Number of Motor Phase Three Phase **Protection Class** IP68 **Insulation Class** F Motor Power 7.5 50HZ **Power Frequency** 380V Rated Voltage (V) Rated Current (A) 14.3 Starting mode direct boot


Seal


Mechanical Seal H-30

Others

Weight (kg) 109

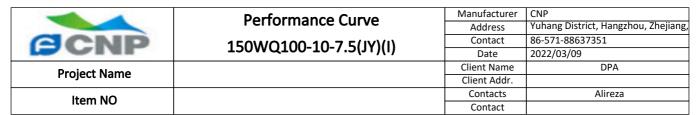


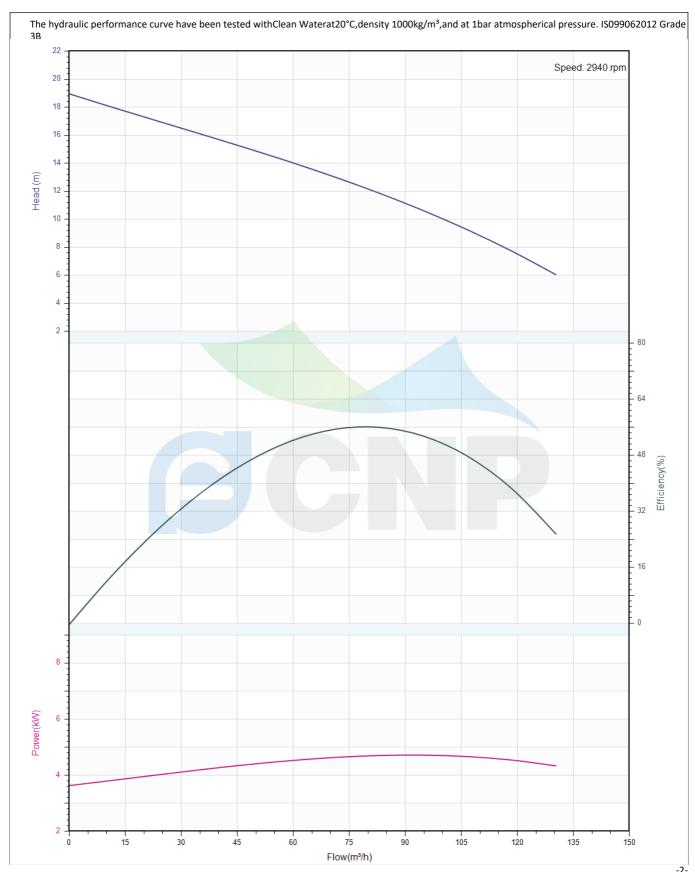

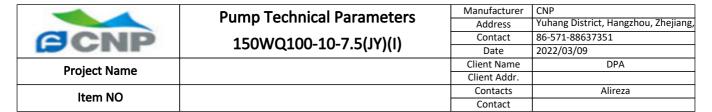



Rated parameters					
Pump model	150WQ100-10-7.5(JY)(I)				
Part NO.	150WQ100-10-5.5(JY)(I)				
Rated flow (m³/h)	100				
Rated head (m)	10				
Rated efficiency (%)	58.4				
Power (kW)	4.67				
Speed (rpm)	2940				

Medium					
Pumped medium	Clean Water				
Working temperature (°C)	20				
Medium density (kg/m³)	1000				
Viscosity (mm²/s)	1				

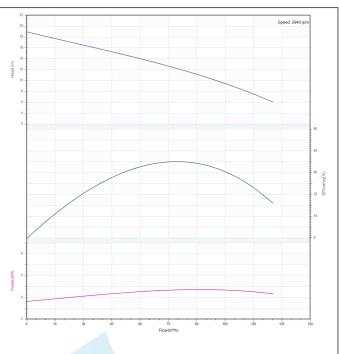



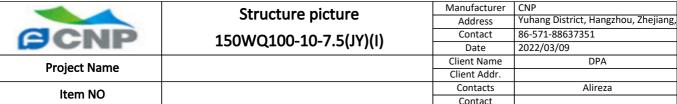

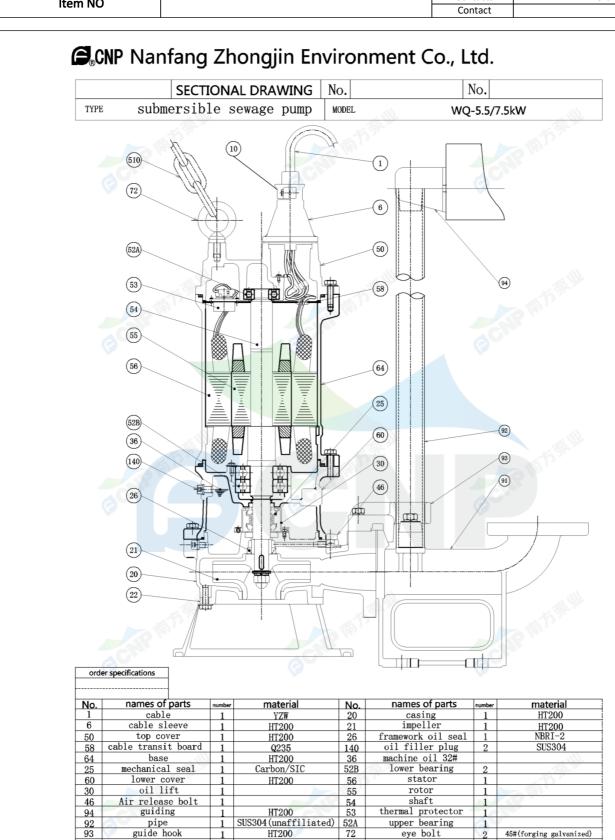

Nanfang Zhongjin Environment CO.,LTD.

lift chain

Cable lockblock

SUS304

unit: mm

HT200

91

22

water outlet base

water inlet cover

	Installation picture	Manufacturer	CNP
	ilistaliation picture	Address	Yuhang District, Hangzhou, Zhejiang,
COND	150WQ100-10-7.5(JY)(I)	Contact	86-571-88637351
	13044 (110-10-7.3()1)(1)	Date	2022/03/09
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
itell NO		Contact	

