	Product Information	Manufacturer	CNP
	Product information	Address	Yuhang District, Hangzhou, Zhejiang,
CND	CDLK3-60/6	Contact	86-571-88637351
	CDLK3-00/0	Date 2022/07/17	2022/07/17
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Part NO.	1100055979	
Product Picture		Note
		Product introduction CDLK/CDLKF is non-self priming multi-stage centrifugal pump installed with standard motor. The motor shaft is directly connected with the pump shaft through coupling. The impellers and diffusers are made of stainless steel plate stamping and welding. In order to meet the requirement of installation depth of the water tank or vessel, it is possible to install cavity diffusers for changing length of the pump. Performance and advantages Compact structure Convenient maintenance Changeable installation depth
technology		

Nameplate standards Material

Pump rotator speed

Impeller 304
Rubber code P
Material Code S

Medium

Medium Temperature normal-15+70Medium Temperature high t-15+105Maximum Environment Temper40

2900

CE

Motor

Number of Motor Phase
Protection Class
IP55
Insulation Class
Motor Power
O.55KW
Power Frequency
Rated Voltage (V)
Rated Current (A)
Energy Efficiency Level


Seal

Mechanical Seal CDL-12/WB1F14

Others

Weight (kg) 18


Performance Curve	Manufacturer	CNP	
	Performance curve	Address	Yuhang District, Hangzhou, Zhejiang,
COND	CDLK3-60/6	Contact	86-571-88637351
CINI	CDLK3-00/0	Date 2022/07/17	2022/07/17
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

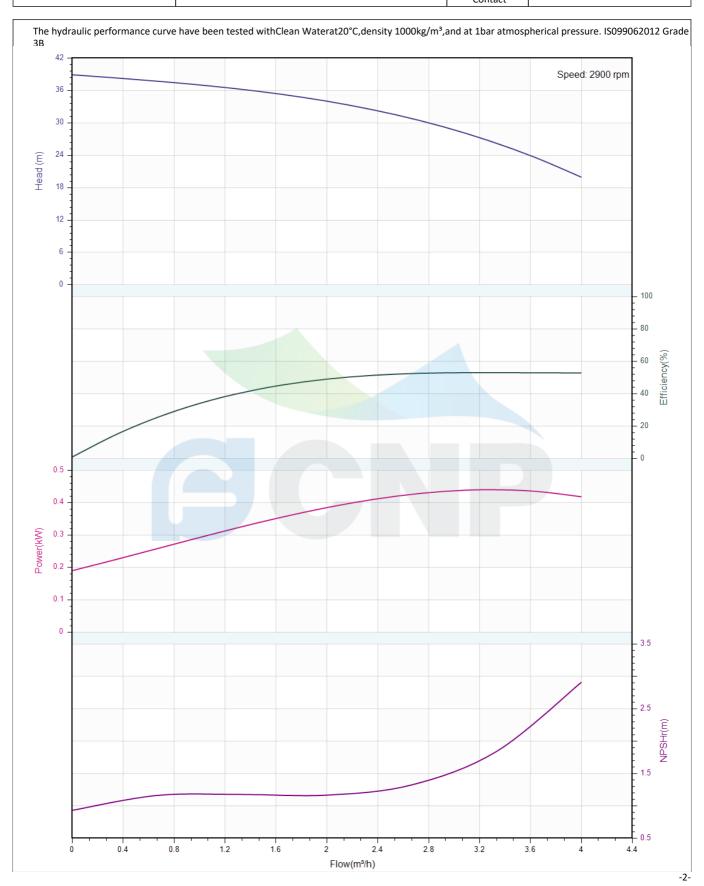

Pump Technical F	Pump Technical Parameters	Manufacturer	CNP Yuhang District, Hangzhou, Zhejiang, 86-571-88637351	
	rump recimical ranameters	Address		
COND	CDLK3-60/6	Contact	86-571-88637351	
	CDLK3-00/0	Date 2022/07/17	2022/07/17	
Project Name	Client Name	DPA		
		Client Addr.		
Item NO		Contacts	Alireza	
		Contact		


Rated parameters			
Pump model	CDLK3-60/6		
Part NO.	1100055979		
Rated flow (m³/h)	3		
Rated head (m)	28		
Rated efficiency (%)	46		
Power (kW)	0.5		
NPSHr (m)	2		
Speed (rpm)	2900		
Max impeller diameter (mm)	73		

Medium	
Pumped medium	Clean Water
Working temperature (°C)	20
Medium density (kg/m³)	1000
Viscosity (mm²/s)	1

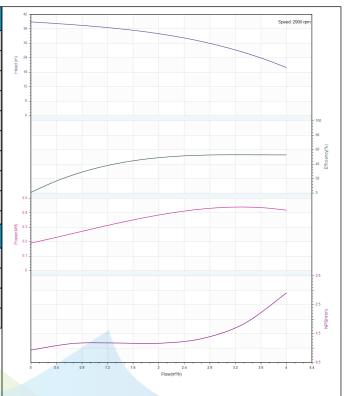



	Structure picture Manufacturer CNP Address Vubang District Hangzhou 7	CNP	
	Structure picture	Address	
COND	CDLK3-60/6	Contact	86-571-88637351
	CDLK3-00/0	Date 2022/07/17	2022/07/17
Project Name		Client Name	DPA
Project Name	Client Addr.		
Item NO		Contacts	Alireza
		Contact	

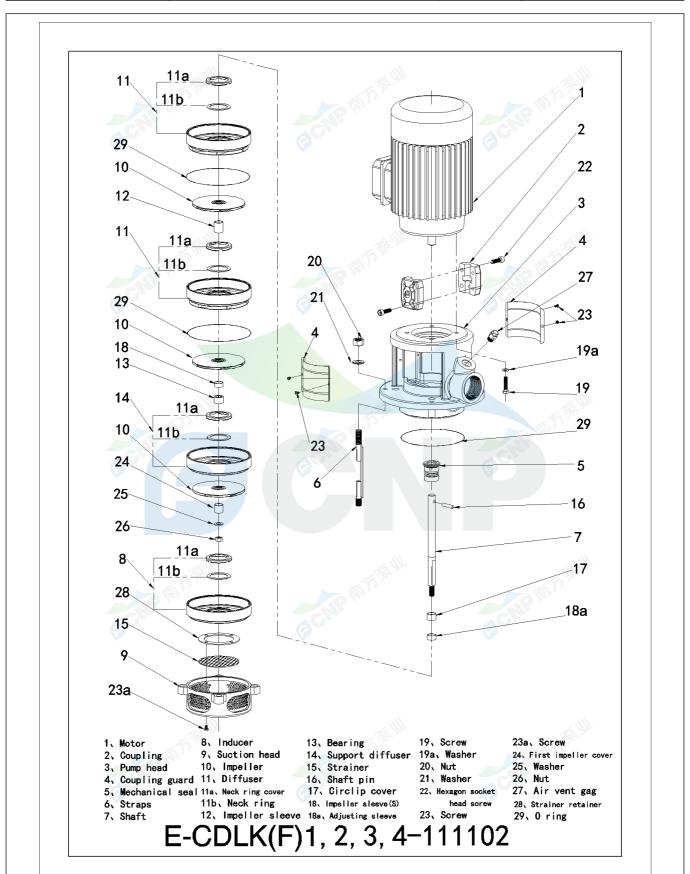

Dimension Drawing	Manufacturer	CNP	
	Difficusion Drawing	Address	Yuhang District, Hangzhou, Zhejiang,
COND	CDLK3-60/6	Contact	86-571-88637351
	CDLK3-00/0	Date 2022/07/17	2022/07/17
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

