
CNP	Product Information	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-140/14	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Part NO.	1100056339		
Product Picture		N	lote
			Product introduction CDLK/CDLKF is non-self priming multi-stage centrifugal pump installed with standard motor.The motor shaft is directly connected with the pump shaft through coupling. The impellers and diffusers are made of stainless steel plate stamping and welding. In order to meet the requirement of installation depth of the water tank or vessel, it is possible to install cavity diffusers for changing length of the pump. Performance and advantages Compact structure Convenient maintenance Changeable installation depth
technology			
Pump rotator speed		2900	
Nameplate standards		CE	
Material			
Impeller		304	
Rubber code		Р	
Material Code		S	
Medium			
Medium Temperature n	ormal	-15+70	
Medium Temperature h	igh t	-15+105	
Maximum Environment	Temper	40	
Motor			
Number of Motor Phase	2	Three Phase	
Protection Class		IP55	
Insulation Class		F	
Motor Power		3.0KW	
Power Frequency		50HZ	
Rated Voltage (V)		220/380V	
Rated Current (A)		10.7/6.2A	
Energy Efficiency Level		IE3	
Seal			
Mechanical Seal		CDL-12/WSF14	4
Others			
Weight (kg)		38	


CONP	Performance Curve	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-140/14	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

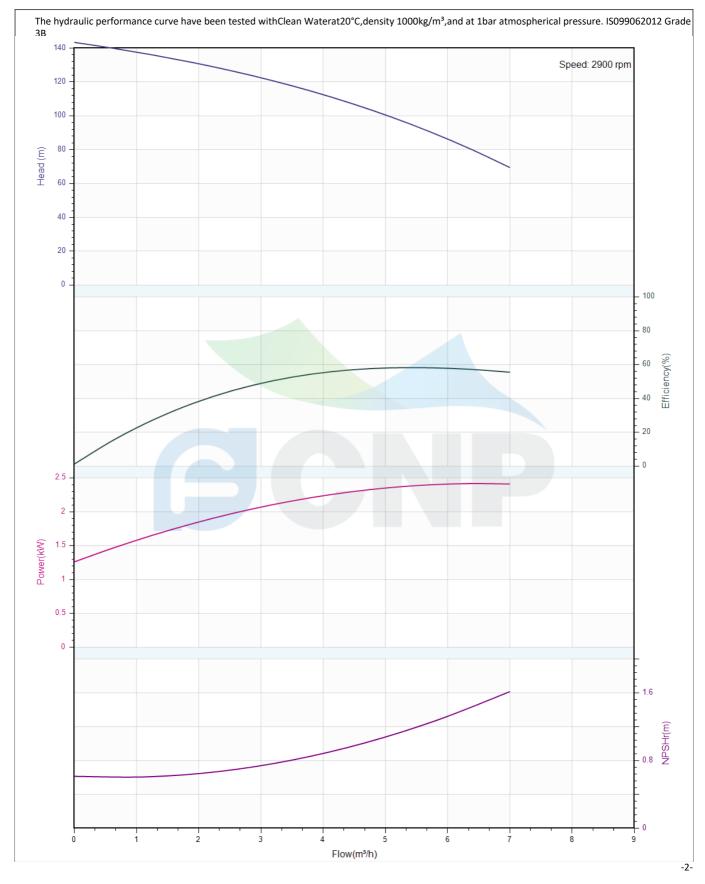

CNP	Pump Technical Parameters	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-140/14	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
FIOJECT Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Pump model	CDLK4-140/14	120	
De l NO			
Part NO.	1100056339	(E 00-	
Rated flow (m <sup>3</sup> /h)	4	10 E	
Rated head (m)	112	20	
Rated efficiency (%)	50	0	
Power (kW)	2.44		
NPSHr (m)	2		
Speed (rpm)	2900		/
Max impeller diameter (mm)	90	25	

Pumped medium	Clean Water	
Working temperature (°C)	20	
Medium density (kg/m³)	1000	
Viscosity (mm²/s)	1	

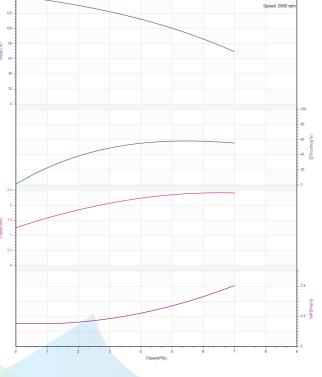

CNP	Structure picture	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-140/14	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

