
CNP	Product Information	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-20/2	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Part NO.	1100056125	
Product Picture		Note
		Product introduction   CDLK/CDLKF is non-self priming multi-stage centrifugal pump installed   with standard motor.The motor shaft is directly connected with the pump   shaft through coupling. The impellers and diffusers are made of stainless   steel plate stamping and welding. In order to meet the requirement of   installation depth of the water tank or vessel, it is possible to install cavity   diffusers for changing length of the pump.   Performance and advantages   Compact structure   Convenient maintenance   Changeable installation depth
technology		
Pump rotator speed	2900	
Nameplate standards	CE	
Material		
Impeller	304	
Rubber code	Р	
Material Code	S	
Medium		
Medium Temperature	normal -15+7	70
Medium Temperature I	nigh t -15+1	105
Maximum Environment	t Temper 40	
Motor		
Number of Motor Phas	e Three	e Phase
Protection Class	IP55	
Insulation Class	F	
Motor Power	0.37K	
Power Frequency	50HZ	
Rated Voltage (V)	220/3	
Rated Current (A) Energy Efficiency Level	1.7/1	.0A
Seal		
Mechanical Seal	CDL-1	12/WB1F14
Others		
Weight (kg)	16	


CONP	Performance Curve	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-20/2	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

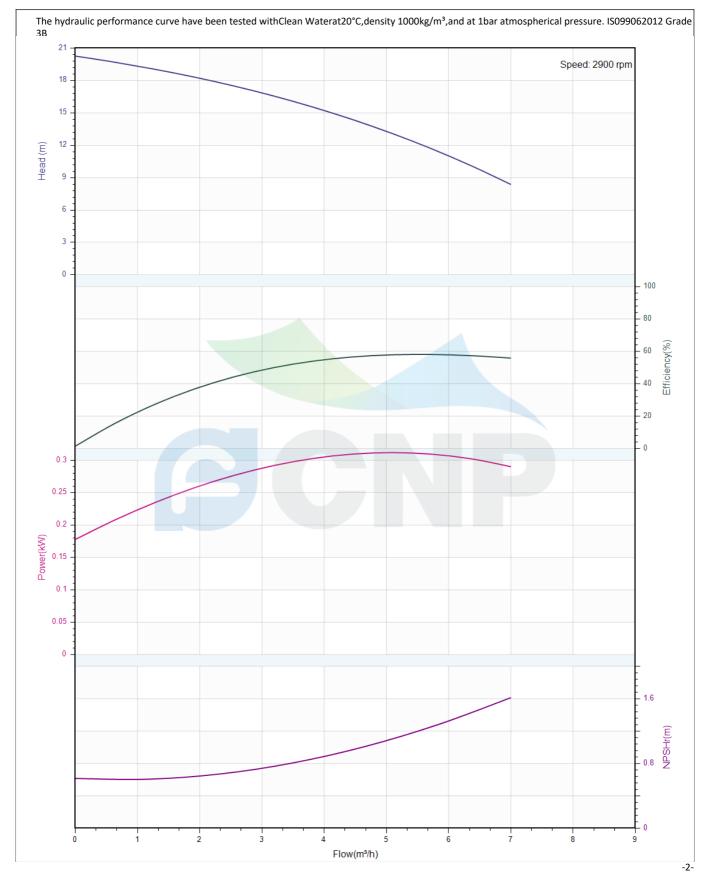

CONP	Pump Technical Parameters	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-20/2	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
Project Name		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

Rated parameters		21
Pump model	CDLK4-20/2	15
Part NO.	1100056125	(j) 12 (j) 12 (j
Rated flow (m <sup>3</sup> /h)	4	9 6
Rated head (m)	15	3
Rated efficiency (%)	50	0 -
Power (kW)	0.33	
NPSHr (m)	2	
Speed (rpm)	2900	
Max impeller diameter (mm)	90	0.3

Medium		
Pumped medium	Clean Water	
Working temperature (°C)	20	
Medium density (kg/m³)	1000	
Viscosity (mm²/s)	1	

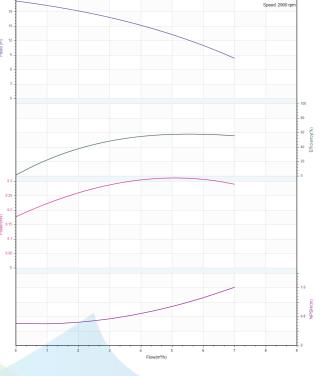

CONP	Structure picture	Manufacturer	CNP
		Address	Yuhang District, Hangzhou, Zhejiang,
	CDLK4-20/2	Contact	86-571-88637351
		Date	2022/07/17
Project Name		Client Name	DPA
		Client Addr.	
Item NO		Contacts	Alireza
		Contact	

